



Obvios™



MP3275 POS Computers for Restaurants and Retail

The new Obvios MP3275 POS Computer is designed to provide a high quality, low cost option to the end user without compromise of performance, aesthetics, ergonomics, or durability.

The Obvios MP3275 has a wide range of ports available for use with many peripherals and devices. It also provides easy access to system parts, such as the Hard Disk Drive, Flash Drive, RAM Slots, and CPU for easy maintenance. The integrated cable cover helps manage the cables, as well as keep unwanted hands from disconnecting devices.

The adjustable 15" Touch Screen monitor is IP54 compliant, assuring that dirt, dust, and minor spills don't slow you down, while employing state of the art Touch Screen technology to guarantee accuracy and durability.

The Obvios MP3275 is a great choice for any retailer, restaurant, or other business needing quality hardware for a very reasonable price.






Obvios MP3275 POS Computers



Unique Features of the MP3275

- Built in 2 line Customer Display
- Integrated cable and port cover to assure optimum cable management and protection
- IP54 Compliant front panel to protect against dust and liquid spillage
- Dual-Core CPU Support for strong system performance, with 2 sockets for DIMM memory expansion
- Great for Retail or Hospitality applications

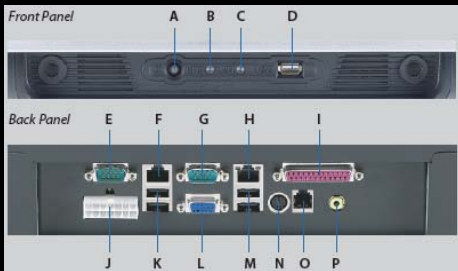

- A - Power Switch w/LED
- B - HDD LED
- C - LAN LED
- D - USB
- E - COM 1
- F - COM 5
- G - COM 2
- H - LAN
- I - Parallel Port
- J - Power In
- K - USB
- L - VGA
- M - USB
- N - Keyboard
- O - Cash Drawer
- P - Audio Out



MP3275

Model	MP-3275
Processor	Intel Celeron 440, 2GHz (Default) / Dual-Core E2160 (1.8GHz)
Memory	512MB standard, maximum 2GB (2 x 240-pin DDR2 SDRAM)
Touch LCD Display	
Size / Resolution	15" TFT LCD / 1024 x 768
Brightness	250 / 350 cd/m2
Touch Screen	5 / 4 wire Resistive
I/O Connectivity and Physical Information	
Serial Port	3 x External : COM1, COM2 (D-Sub) & COM5 (RJ45) with 5V/12V/RI pwr supply select 3 x Internal : COM3 for Primary Touchscreen, COM4 for built-in LCM display & COM6
Parallel Port	1 x Bi-directional Parallel Port
USB Port	8 x USB 2.0 (5 x external; 1 in front 4 in rear, 3 x internal)
Cash Drawer Port	1 x 12V RJ11
PS/2	1 x Keyboard
LAN Port	1 x RJ45 10/100 Base-T
Video Port	1 x VGA (D-Sub 15-pin)
Audio Port	1 x Line-out
Storage Device	1 x 2.5" SATA HDD 1 x CF Card (optional)
Speaker Integrated	Integrated 2+2W stereo speakers
LCM Cust Display	Built-in blue polarizer w/ bright backlight (Large 20x2 9mm Characters)
Power Supply	270W External Power Supply with 12V/24V output support
Construction	ABS+SECC
Housing Color	Charcoal+Silver
O/S Supported	Windows XP, WEPOS, Vista, Fedora, SuSE Linux
Dimensions	382 x 356 x 285 mm (w/o cable cover) / 382 x 356 x 388 mm (w/ cable cover)
EMI/Safety	CE, FCC
Operating Temp	0°C ~ 40°C
Optional Peripherals	
MSR	Integrated MSR single/dual/triple track
Wireless Module	Integrated 802.11b/g wireless LAN module Integrated CDMA module Integrated GPRS module

