



RP7000 Series Wall Mounted Computers for Restaurants and Retail

Obvios is proud to introduce the new RP7000 series wall mounted touch screen computers, uniquely designed and constructed to save space while keeping aesthetics, ergonomics, reliability, and a wide range of uses in mind.

The RP7000 series computers are ideal for Hospitality and Retail businesses alike, combining powerful processing with wireless networking, and state-of-the-art touch screen technology, along with optional barcode scanners, MSR and MCR readers, biometric readers, iButton technology, and even built-in multi-media speakers.

Perfect for POS stations, restaurant server stations, price check stations, self serve promotional stations, and even multimedia broadcasting stations, the RP7000 can play many roles and yet stay up and out of the way.

Available in both 15" and 17" screen sizes, you're sure to find one that fits your exact needs.






Obvios RP7000 Series Computers



RP7000 Series

Unique Features of the RP7000

- Fanless design for noise free environments and better reliability
- Available in Silver or Black to fit into the design of your space
- Space saving ultra slim and wall mountable design
- Optional barcode scanner and speakers make it a perfect solution for price checking and promotions
- Great for Retail or Hospitality applications

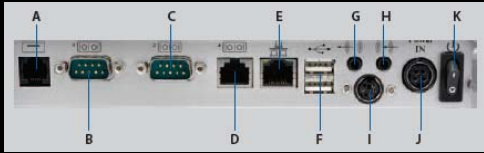

- A - Cash Drawer Port
- B - COM 1
- C - COM 2
- D - COM 4
- E - LAN
- F - USB
- G - Line Out
- H - MIC In
- I - Keyboard
- J - Power In
- K - Power Switch

Model	RP-7515B/RP-7515PB	RP-7517B/RP-7517PB
Processor	Intel ULV Celeron-M 1GHz with 0k L2	
Memory	256MB standard, maximum 1GB (1 x 200-pin DDR SDRAM SO-DIMM)	
Touch LCD Display		
Size / Resolution	15" TFT LCD / 1024 x 768	17" TFT LCD / 1280 x 1024
Brightness	250 / 350 cd/m2	300 cd/m2
Touch Screen	5 / 4 wire Resistive / IR (for 15")	
I/O Connectivity and Physical Information		
Serial Port	3 x External : COM1, COM2 (DB9), COM4 (RJ45) 3 x Internal : COM3 for Primary Touchscreen, COM5 & COM6	
USB Port	4 x USB 2.0 (2 x external, 2 x internal)	
Cash Drawer Port	1 x 12V RJ11 (single/dual)	
PS/2	1 x Keyboard	
LAN Port	1 x RJ45 10/100 Base-T	
Audio Port	1 x Line-out, 1 x Mic-in	
Storage Device	1 x 2.5" SATA HDD 1 x CF Card (optional)	
Speaker Integrated	2+2W stereo speakers (only on RP-7515P & RP-7517P)	
Power Supply	60W (12V/5A) Power Adaptor	150W (12V/12.5A) Pwr Adaptor
Construction	Aluminum Die-casting Housing, Plexi-Glass Acrylic (front bezel)	
Housing Color	Black/ Silver(Standard), Red/ Blue/ Golden(MOQ Required)	
O/S Supported	Windows XP, XPE, WEPOS	
Dimensions	374 x 316 x 92 mm	416 x 354 x 100 mm (W x H x D)
EMI/Safety	CE, FCC	
Operating Temp	0°C ~ 35°C	
Optional Peripherals		
MSR	Integrated triple/track MSR	
MSR 2 or 3-in-one	Integrated MSR+i-Button/MSR+RFID/MSR+Fingerprint/MSR+Smartcard+i-Button	
Scanner Module	Laser Scanner: Metrologic IS3480 Speaker: 2W X 2	

